

Raman LIDAR at CRLF

Raman LIDAR runs for the FD shift period.

- before FD shift 24 min

- after FD shift 12 min

Raman LIDAR STATUS.

- active channels: Raman N2, Raman H2O.

Raman LIDAR performances.


- useful profiles of:

- VAOD (vertical aerosol optical depth) = 11 of 29
- aerosol backscatter coefficient = 0 of 29
- H2O mixing ratio = 11 of 29

- UNuseful profiles due to:

- software/hardware problems = 17
- precipitation and/or low clouds = 1

Timeseries of VAOD values and corresponding errors at 1.5 ± 0.3 , 3.0 ± 0.3 and 4.5 ± 0.3 km above ground level.

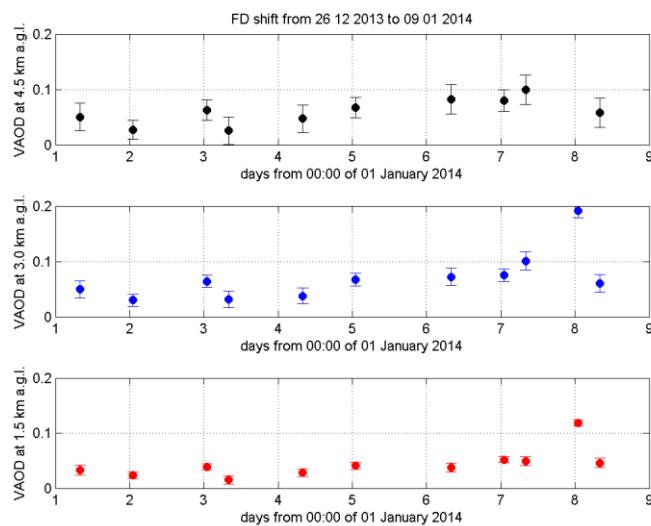

Histograms of VAOD values at 1.5 ± 0.3 , 3.0 ± 0.3 and 4.5 ± 0.3 km above ground level.

